




[www.hobo.in](http://www.hobo.in)



## Our Products

## DROP FORGED FITTINGS

Our products are designed for fast, efficient on-site installation. Zinc-coated and chrome passivated (unless otherwise indicated on this website), for maximum corrosion prevention, they require virtually no maintenance. Additionally, all scaffold fittings are supplied with fully captive nuts. All our scaffold fittings are designed to accommodate British Standard 48.3mm O/D scaffold tube, unless otherwise stated. We operate a rigorous quality assurance policy. All products are produced in accordance with British and European standards and manufactured to the requirements of EN ISO 9001.

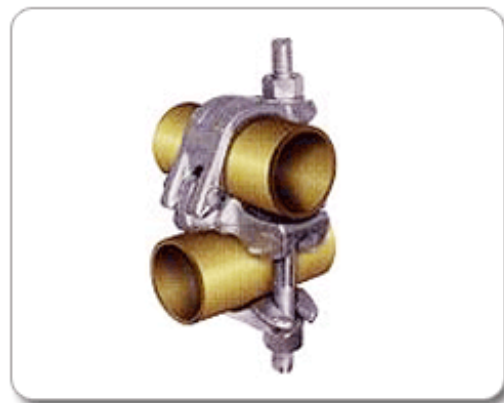

### DOUBLE COUPLER (FORGED TYPE)

Pressed type double couplers provide stronger grip. Easier to handle when connecting standard to standard or ledger to ledger and any tube having an outside diameter of 48.3mm at right angle or 90o


Min. Slip Load: 12.5 KN.

Min. Distortion Load: 30 KN.

Weight: 1.25 kg

Code: 05802-02

Drop Forged Plated (also available in Black and Galv.)

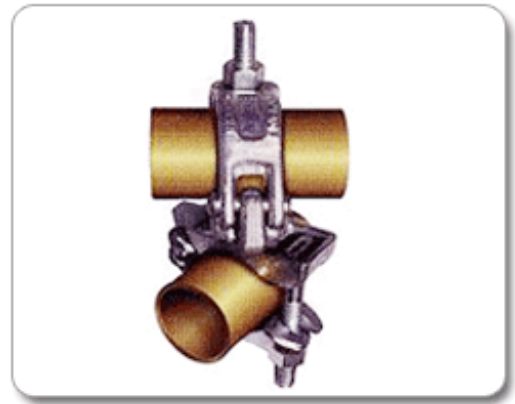

### Drop Forged Swivel Coupler

SWIVEL COUPLER (FORGED TYPE)

Forged type swivel coupler feature the same facility as the pressed type except that it is designed with added grip strength and easier to handle.

Weight: 1.25 kg

Min. Slip Load: 12.5 KN.

Min. Distortion Load: 17 KN.

Drop Forged Plated (also available in Black and Galv.)



### SINGLE COUPLER

A rapid fitting for the erection of putlogs and transoms to a permanent fixture.

Drop Forged Plated

### Putlog (Single) Coupler (Forged)

Size: 48mm, 51mm

Min. Slip Load: 12.5 KN.

Min. Distortion Load: 2.30 KN.



## TOE BOARD BRACKET

Size: 48 mm & 51 mm

Telephone Number	+91-161-2676886 , 2677656
Mobile Number	+91-98724-07650
Fax Number	+91-161-2675866 , 2676866
E-mail	info@hobo.in
Website	<a href="http://www.hobo.in">http://www.hobo.in</a>
Postal Address	<b>CAYMAN INTERNATIONAL</b> D-142, Phase V, Focal Point, Ludhiana (India).